
No. 9195

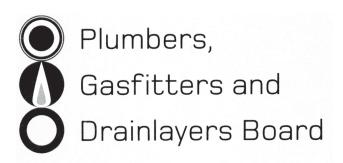

REGISTRATION EXAMINATION, NOVEMBER 2022 CERTIFYING PLUMBER

ANSWER SCHEDULE

(a) Any fixtures discharging to ORG correct size.

System vented in correct location(s).

Any FWGs correctly charged.

Underfloor pipework and branches sized correctly.

All fixtures allowed for.

No changes to drainage plan.

Total 9 marks

ANSWER 2

(a) (i) 300 mm. (1 mark)

(ii) Correct points indicated (bottom of valve and ground).

(1 mark)

- (b) Any TWO (1 mark each):
 - Back siphonage caused by drop in inlet pressure.
 - Back pressure with faulty 2nd check valve.
 - Split diaphragm.

Faulty 1st check valve.

(2 marks)

(c) Independent Qualified Person (IQP).

(1 mark)

(d) Local territorial authority.

(1 mark)

Total 6 marks

ANSWER 3

| Pipe section | Number of clips |
|---------------|-----------------|
| A – B (25 mm) | 8 |
| B – C (20 mm) | 4 + 4 = 8 |
| C – D (15 mm) | 3 |
| C – E (15 mm) | 7 + 3 = 10 |
| B – F (20 mm) | 6 |
| F – G (15 mm) | 5 + 3 = 8 |
| F – H (15 mm) | 7 + 4 = 11 |

Total 7 marks

| Index Length | Pressure Drop |
|--------------|---------------|
| | |

| Pipe section | Total loading units | Probable simultaneous flow rate (L/S) | Pipe size (DN) |
|--------------|---------------------|---------------------------------------|----------------|
| A – B | | | |
| B – E | | | |
| B – C | | | |
| C – F | | | |
| C – D | | | |
| D – G | | | |
| D – H | | | |
| H – I | | | |
| H – J | | | |
| J – K | | | |
| K – L | | | |

Total 16 marks

ANSWER 5

$$615 - (300 + 200 + 45) = 70$$
 (1 mark)
 $4100 + 100 = 4200$ (1 mark)
 $4200/70 = 60$ (1 mark)
Gradient 1:60 (1 mark)
Total 3 marks

(a) Any TWO (1 mark each):

Dead legs.

Cooling towers.

Stored water at bacteria friendly temperatures.

(2 marks)

(b) Any TWO (1 mark each):

Open all outlets regularly.

Keep the thermostat of storage water heater set to above 70°C.

Install a UV filter.

Treat the water.

Lag the pipework.

(2 marks)

Total 4 marks

ANSWER 7

- (a) (i) Any FOUR (½ mark each):
 - Lead.
 - Adhesives/sealants.
 - Solvents.
 - Solder.
 - Flux.
 - Concrete.
 (2 marks)
 - (ii) Material safety data sheet.

(1 mark)

- (iii) Any THREE (1 mark each):
 - · PPE gear to be used.
 - · Chemical properties of the substance.
 - · First aid required should harmful contact occur.
 - Advice on who/where to contact (hospital, poison helpline etc) should further assistance be required.

(3 marks)

| b) | Action | Minimise | Eliminate |
|----|--|----------|-----------|
| | Training staff in correct use of equipment | ✓ | |
| | Completing work usually performed at heights on ground level | | √ |
| | Providing screens around an area where welding is taking place | ✓ | |
| | Using edge protection when working at heights | √ | |

(2 marks)

(c) Any FOUR (1 mark each):

Assess any risks to personal safety.

Provide first aid to the victim without endangering yourself.

Contact medical help if required. Complete the accident register and any other paperwork or notification necessary.

Make any possible changes to ensure accident will not reoccur.

Review procedures to check if the changes made are lowering the accident rate.

(4 marks)

(d) Any FOUR (1 mark each):

How to adjust guards.

PPE to be worn.

Method of isolation – turning on and off.

Pre-use inspections.

Procedure to be followed in emergency.

Correct operating procedure.

(4 marks)

Total 16 marks

ANSWER 8

T1 =
$$42 - 13 = 29$$
 (½ mark)
T2 = $65 - 13 = 52$ (½ mark)
Flow rate = $9/60 = 0.15$ litres per second (1 mark)

Storage required =
$$\frac{420 \times 0.15 \times 12 \times 29}{52 \times 0.85}$$
 (2 marks)
= 496 litres (1 mark)

(5 marks)

(b) 3 restraints

100 mm down from top

100 mm up from bottom

Wooden batten down each side of the cylinder.

(4 marks)


Total 9 marks

| Item | Length of time (years) |
|---|------------------------|
| Single-lever mixer including flexible connections | 5 |
| Under-slab discharge pipework | 50 |
| EDPM rubber boot flashing used to seal a roof penetration | 15 |

Total 3 marks

ANSWER 10

(a)

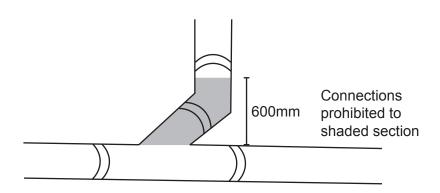

(2 marks)

- (b) Either (1 mark)
 - If foaming is likely.
 - If the stack was more or more than three levels high.

(1 mark)


(c) To prevent trap seal loss by compression.

(2 marks)

Total 5 marks

ANSWER 11

(a) (i)

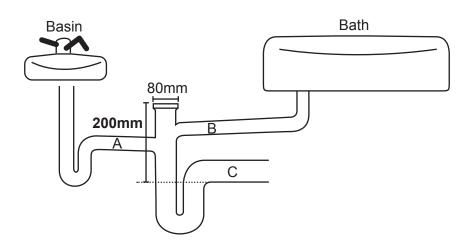

(2 marks)

(ii) 2.5 m (1 mark)

(iii) 1.2 m (1 mark)

(iv) 8 (2 marks)

(v) 65 mm (1 mark)

(b) (i) Any TWO (1 mark each)

WC.

Kitchen sink.

Slop hopper.

Laboratory sink.

Another floor waste gully. (2 marks)

- (ii) Either (1 mark)
 - · To prevent smells entering the building.
 - To prevent a chemical reaction from drainage from a laboratory sink.

(1 mark)

Total 10 marks

SECTION B

- 1. B Photographic equipment.
- 2. A A urinal.
- 3. A 115
- 4. C 27
- 5. D 125
- 6. A In the event of a waste pipe blockage, dirty water from one sink could contaminate clean water in the other.
- 7. B The fixture discharge pipe connects to the floor waste gully below the top of the water seal.
- 8. C Tundish.
- 9. C 40 mm.
- 10. A 3
- 11 C 3 minutes stabilisation followed by a 2 minute test.
- 12. E 50 years.

Total 12 marks